



STRENGTH / QUALITY / PERFORMANCE

# TIP TRAILERS



# TIP TRAILERS

## 4.5 – 20 TONNE

You expect a lot from your farm machinery, and McIntosh Tip Trailers deliver, every time. Our trailers offer exceptional tonnage ratings thanks to the super-strong chassis, heavy-duty deck runners and closely-spaced cross members. Combining a high quality of build and an emphasis on strength, McIntosh trailers have earned a reputation as the toughest and most durable farming trailers on the market.

Smart design features help get the job done efficiently, safely and easily. The rigid design minimises twisting in the trailer when the deck is raised, which reduces the risk of tipping over when working on rolling country. Other features include a high tipping angle, easily removable tailgate and side panels, plus a host of optional extras to meet your specific needs.

### STANDARD FEATURES

- Auto-opening tailgate
- Bottom of ram above bottom of chassis
- Headboard and tailgate higher than side panels
- Removable tailgate
- Removable sides
- Rope rails supported at every cross member
- Spreader chains
- Swivel drawbar tongue
- Tipping angle 54°-61°



Single rams on all trailers for better stability on hills

### OPTIONAL EXTRAS

- Brakes on 2 or 4 wheels
- Hydraulic or air brakes
- Hay extension (900mm or 1200mm)
- Hydraulic jack
- Different deck dimensions available by request
- Hydraulic tailgate release
- Swinging tailgate
- Remote axle greasing
- Silage crate
- Sprung drawbar
- 40mm timber or 5mm steel deck
- Tyre size options
- LED lights
- Skid



## TRAILER FEATURES



- Bracing between ram and axle stiffens chassis, prevents bending & twisting



- Professional paint finish, with automotive sealant to prevent rusting




- Silage Crates have folding top front panel for loading the first round, plus wire rope or ram to lift the back door



- Tailgate catches are fully supported and forward facing for better strength, durability and safety



- Galvanised spreader chains, 16mm tailgate catches, greasable pivots and full width hinge bar for added strength

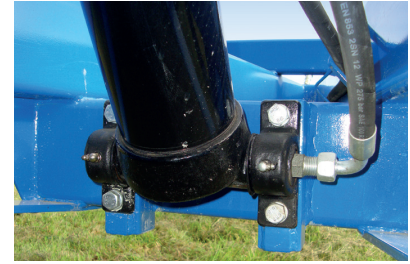

- Multi-stage rams mounted in line with chassis to prevent damage over rough terrain

## TIP TRAILER SPECIFICATIONS

	4.5 T	6 T	8 T	10 T	12 T	12 T WIDE	14 T	14 T BATH TUB	18 T	20 T
<b>DECK LENGTH (M)</b>	3.2	3.6	3.6	4.2	4.6	4.2	5	4.8	5.5	5.5
<b>DECK WIDTH (M)</b>	2.3	2.4	2.4	2.4	2.5	2.8	2.5	2.44	2.5	2.8
<b>DECK HEIGHT (M)</b>	1.08	1.11	1.11	1.12	1.22	1.22	1.32	1.32	1.31	1.31
<b>SIDE HEIGHT (MM)</b> *OTHER SIZES AVAILABLE	380	450	450	500	600	600	600	800	800	800
<b>CAPACITY – LEVEL LOAD (M<sup>3</sup> APPROX.)</b>	2.6	3.7	3.7	4.8	6.5	6.7	7.1	8.9	9.2	10.3
<b>AXLES</b>	SINGLE	TANDEM	TANDEM	TANDEM	TANDEM	TANDEM	TANDEM	TANDEM	TANDEM	TANDEM
<b>HYDRAULIC RAM (STAGE)</b>	SINGLE	FOUR	FOUR	FOUR	FIVE	FIVE	FIVE	FIVE	SIX	SIX
<b>TYRE SIZE</b>	12/80-15.3	11/80-15.3	12/80-15.3	400/60-15.5	15/70-18	15/70-18	385/65R22.5	385/65R22.5	550/60-22.5	550/60-22.5
<b>TARE WEIGHT (APPROX KG)</b>	1065	1700	1750	2390	3430	3510	3810	4290	5150	5750



- Fully welded sides & tailgate prevent rusting, as it is fully sealed from water. Stronger than straight-pressed sides



- Adjustable automatic trip with 16mm threaded rod, plus optional hydraulic tailgate



- Swivel tongue with two plates to attach safety chains



- Handles on sides and tailgates for easy removal

# PRODUCT RANGE

## FORAGE WAGONS

Available from 7.8 – 27.2m<sup>3</sup>, McIntosh Wagons are renowned for their strong, fully-welded steel sides, true bathtub design and elevator angle that allows it to start every time - even when the front is fully loaded.



## BALE FEEDERS

Available in single, double trough and Quad models, the newest series of McIntosh Bale feeders feature a deep V cradle, larger high-capacity hydraulic motor, twin catches and heavy-duty chains.

## BEATER WAGONS

Available from 12-20m<sup>3</sup>, three PTO horizontal driven beaters are designed to blend different products and feed out in an even and consistent manner. These units are well suited for feed pads and the paddock.



## MANURE SPREADERS

Available in 7.5, 10.8, and 13.5m<sup>3</sup>, McIntosh Manure Spreaders are designed to spread a wide variety of products in a consistent and even manner. New 13mm floor chains and improved sealing rubbers have enhanced the performance and build quality.

## MCINTOSH BROTHERS ENGINEERING LTD

- 85 Armstrong Street | PO Box 4240 | Palmerston North, New Zealand
- Freephone: 0800 622 276 | Phone +64 6 356 7056 | Fax +64 6 356 7055
- [sales@mcintosh.net.nz](mailto:sales@mcintosh.net.nz) | [www.mcintosh.kiwi](http://www.mcintosh.kiwi)
- Australian Distributor | Trac Mac Farm Equipment | Drouin Victoria | 041 851 5510 | [allans@tracmacs.com.au](mailto:allans@tracmacs.com.au)

*All equipment is guaranteed for 12 months from the date of entering service, provided it has not been subject to improper usage and/or overloading or any other conditions contrary to the manufacturers' specifications or recommendations. Specifications are subject to change without notice.*

